

55124

JEEP WRANGLER

WIRING LOCATION GUIDE GUÍA DE UBICACIÓN DEL CABLEADO IDE D'EMPLACEMENT DES FILS



MUST READ FIRST!

All steps must be followed to ensure correct function of the T-Connector. To verify proper installation once installed, test by connecting a test light or properly wired trailer.

¡DEBE LEERSE PRIMERO!

Debe seguirse todos los pasos para asegurar el correcto funcionamiento del Conector-T. Para verificar la correcta instalación, pruebe conectando una luz de prueba o un remolque debidamente cableado.

À LIRE D'ABORD!

Pour assurer le bon fonctionnement du T-Connector, il faut suivre toutes les étapes. Pour vérifier que l'installation a été bien effectuée, branchez un feu de test ou une remorque correctement filée.

2/25/08



English


1. On driver's side rear taillight(S1), remove screws securing taillight to vehicle.
2. Separate vehicle's wiring connectors, making sure not to break locking tabs.
3. Place T-connector harness near vehicle's wiring and match male to female connectors and insert. ^B Be sure T-connector is fully inserted and tabs lock in place.
4. Find suitable grounding location near T-connector wiring such as existing bare metal screw and secure white ground wire. If needed, use self-tapping screw provided to secure to vehicle.
5. Reassemble.

WARNING !

Verify miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage to vehicle and/or personal injury .

Español

Français

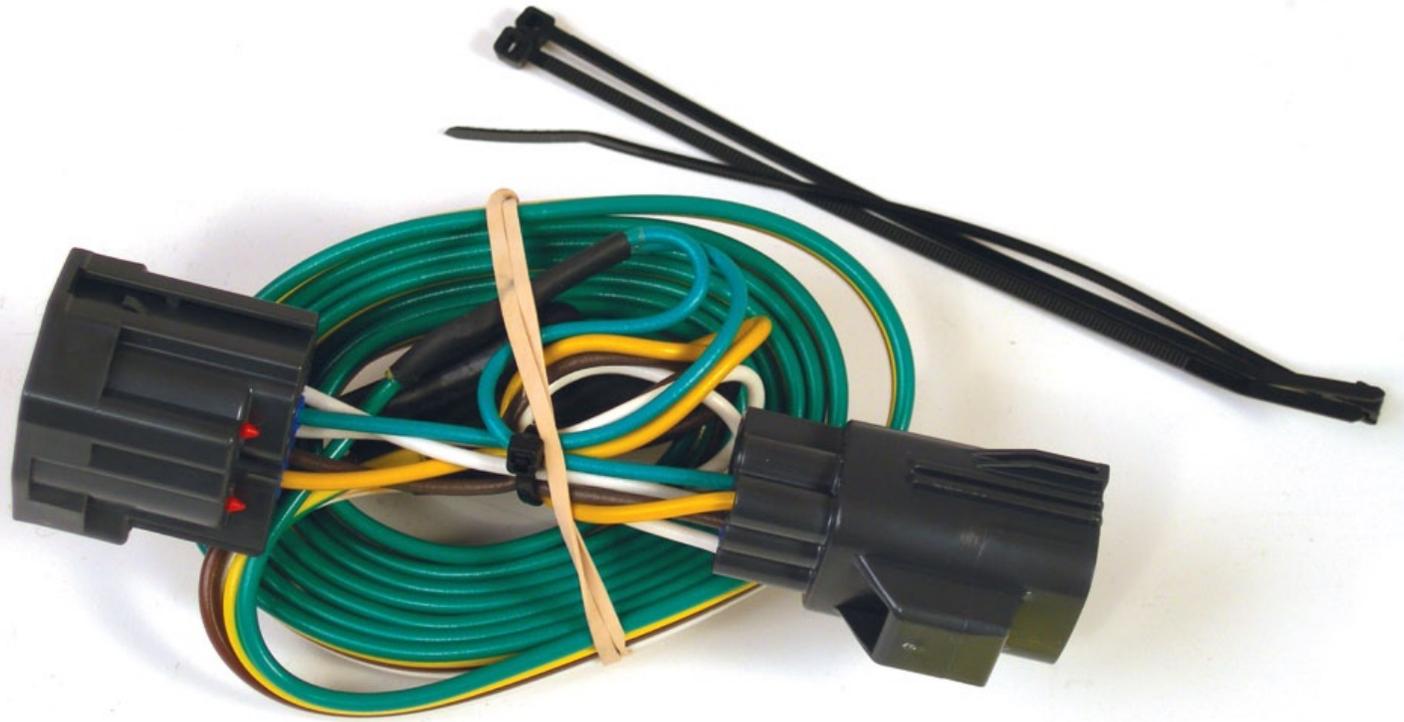

55124